




## Non-Metallic DF3500 Dairy Case Conveyor Chain

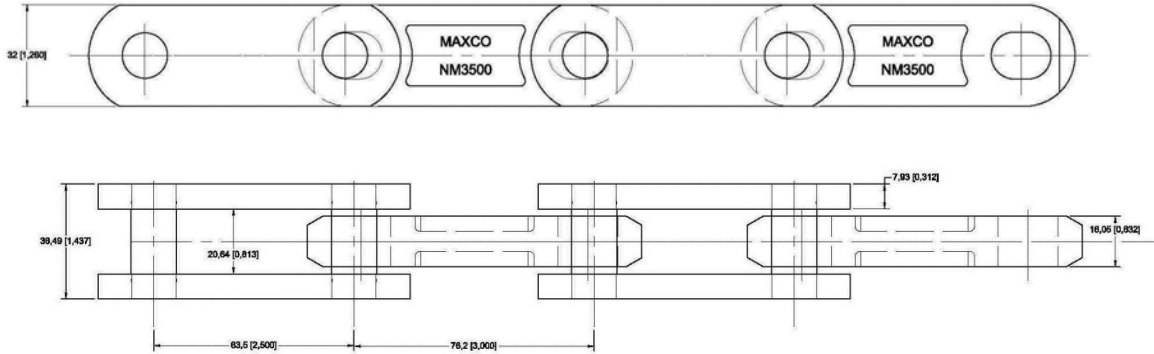

Pitch1	Pitch2	Height	Side Bar Thickness	Pin Diameter	Overall Width	Average Weight (#/ft.)	Min Flex Radius	Average Tensile Strength
2.500"	3.000"	1.250"	.312"	.567"	1.500"	.81	18.0"	2,700 lbs.

Material: Delrin 100P with 304SS pins

Ratio of chain speed(fpm) to conveyor length (ft)	Rated Working Load (lbs)	Ratio of chain speed(fpm) to conveyor length (ft)	Rated Working Load (lbs)
0.1	725	2.5	450
0.2	675	3.0	435
0.3	655	3.5	415
0.4	635	4.0	395
0.5	620	4.5	380
0.6	610	5.0	360
0.7	600	6.0	340
0.8	590	7.0	320
0.9	580	8.0	300
1.0	570	9.0	280
1.5	520	10.0	260
2.0	465		

Call 1-800-PLASTOK for more information